


Environmental Product Declaration

Global GreenTagEPD Program: Compliant to EN15804+A2 2019



Vertilux Corporation Pty Ltd Euroscreen® Transparent Blind Fabric 22 Thomsons Rd, Keilor Park VIC 3042

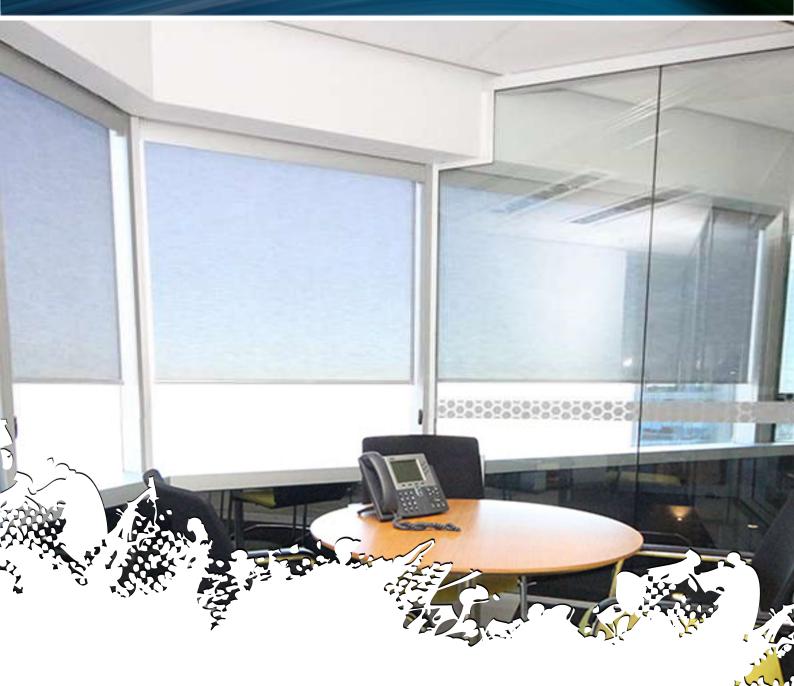



Mandatory Disclos	ures							
EPD type	Cradle to grave	A1 to C4 + D	EPD Numbers	\$	VER TR04 2022EP			
Issue Date	16 December 2022		Valid Until		16 December 2027			
Demonstration of	f Verification							
PCR		5804+A2 2019 so V1 also applies		roduct C	ategory Rules (PCR) [1] Sub			
☑ Internal	Jehun Jones 16 December 2022 16 Dec 2 16 Dec 2	LCA Developed by Delwyn Jones, The Evah Institute LCA Reviewed by Direshni Naiker Ecquate Pty Ltd EPD Reviewed by David Baggs, Global GreenTag Pty Ltd						
☑ External		a. Independent external verification of the declaration and data, mandatory for business-to-consumer communication according to ISO 14025:2010 [2].						
Communication		This EPD discloses potential environmental outcomes compliant with EN 15804 for business-to-business communication.						
Comparability	program EPDs	Construction product EPDs may not be comparable if not EN15804 compliant. Different program EPDs may not be comparable. Comparability is further dependent on the product category rules and data source used.						
Reliability		relative express esholds, safety i			npacts on category endpoints,			
Owner	This EPD is the	property of the c	leclared manufa	cturer.				
Explanations		atory informatio ication1@global			@globalgreentag.com or by			
EPD Program Op	erator	LCA and EPD	Producer	Declara	ation Owner			
Global GreenTag	Pty Ltd	Ecquate Pty Lt	d	Vertilux	Corporation Pty Ltd			
PO Box 311 Cann	on Hill	PO Box 123 Th	nirroul	PO Boy	611 Tullamarine,			
QLD 4170 Austral	ia	NSW 2515 Aus	stralia	VIC 3043 Australia				
Phone: +61 (0)7 3	3 999 686	Phone: +61 (0)	7 5545 0998	Phone: +61 (0) 3 9330 1577				
http://www.globalg	reentag.com	http://www.eva	h.com.au	https://\	www.vertilux.com.au			









Program Description																			
EPD Scope	Cr	Cradle to grave A1 to C4 + D as defined by EN 15804 [1]																	
System boundary		The system boundary with nature includes material and energy acquisition, processing, manufacture, transport, installation plus waste arising.to end of life.																	
Stages included	Op	bera	tion	s A1	to D3	3													
Stages excluded	No	о ор	erat	ion v	vas e	xclu	ded	but n	o flo	ows a	arose i	n mo	dule	s B4,	B5, I	B6, E	87 an	d C3.	
Information Modules		Figure 1 depicts all modules being declared including some with zero results. Any module not declared (MND) does not indicate a zero result.																	
Model		Actual Scenarios Potential							ial										
Information						Buil	ding	Life	Сус	le As	ssessn	nent					Supp	leme	ntary
Stages	D	rodu	ict	Cor	nstruc				U	se				End	of Life	~	Ben	efit 8	load
Modules	Г	Tout	JUL	00	ISUUC		I	Fabri	с		Opera	ation	End-of-Life			5	beyond system		
Unit Operations	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D1	D2	D3
Cradle to grave phases	Resources	Transport	Manufacture	Transport	Construct	Use	Maintain	Repair	Replace	Refurbish	Energy use	Water use	Demolish	Transport	Process Waste	Disposal	Reuse	Recovery	Recycling

Figure 1 EPD Life Cycle Modules Cradle to Grave

Data Sources

Primary	ta Data is from primary sources 2017 to 2022 including the manufacturer and suppliers' standards, logistics, technology, market share, management system in accordance with EN ISO 14044:2006, 4.3.2 [4]. All are physically allocated not economically allocated.
A1-A3 Si inclusio	Operations include all known raw material acquisition, refining and processing plus scrap or material reuse from prior systems; electricity generated from all sources with extraction, refining & transport plus secondary fuel energy and recovery processes. Also, transport to factory gate; manufacture of inputs, ancillary material, product, packaging, maintenance, replacement plus flows leaving at end-of-waste boundary and fates of all flows at end of life
Variabili	Significant differences of average LCIA results are declared.
Chemica Concern	of Contains no substances in the European Chemicals Agency "Authorised or Candidate Lists of Substances of Very High Concern (SVHCs)".

Data Quality

Data cut-off & quality criteria complies with EN 15804 [1] The LCA used background data aged <10 years and quality parameters tabled below.

Background	Data Quality	Parameters and Uncertainty (U)						
Correlation	Metric σg	U ±0.01	U ±0.05	U ±0.10	U ±0.20			
Reliability	Reporting	Site Audit	Expert verify	Region	Sector			
	Sample	>66% trend	>25% trend	>10% batch	>5% batch			
Completion	Including	>50%	>25%	>10%	>5%			
Completion	Cut-off	0.01%w/w	0.05%w/w	0.1%w/w	0.5%w/w			
Temporal	Data Age	<3 years	≤5 years	<7.5 years	<10 years			
remporar	Duration	>3 years	<3 years	<2 years	1 year			
Technology	Typology	Actual	Comparable	In Class	Convention			
Geography	Focus	Process	Line	Plant	Corporate			
	Range	Continent	Nation	Plant	Line			
	Jurisdiction	Representation is Global	Representation is Global. Africa, North America, Europe, Pacific Rim					



System Analysis Scope and Boundaries

Stages A1 to 3 model actual operations. Stage A4 to C4 are model scenarios.

Typical scenarios are assumed to forecast unit operations as described in the next section.

Figure 2. shows included processes in a cradle to grave system boundary to end of life fates reuse, recycling, or landfill grave beyond the boundary.

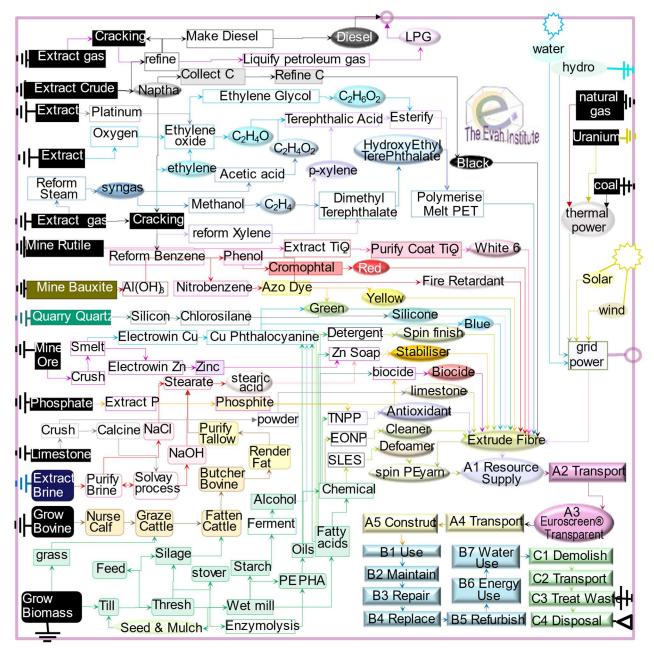


Figure 2. Product Process Flow Chart



Environmental Impact Terminology

Environmental impacts contributing to risks of social and ecological issues and collapse are tabled below with common names and remedies given for each indicator.

Global warming forcing Climate Change	Greenhouse gases absorb infra-red radiation. This heat reduces thermal energy differentials, from equator to poles, forcing ocean current and wind circulation to blend and regulate climate. Weakly blended "lumpier" weather has more frequent, extreme heat wave, fire-storm, cyclone, rain-storm, flood and blizzard events. Accumulation of carbon dioxide, natural gas methane, nitrous oxides and volatile organic compounds from burning fossil fuels causes global warming. Forest and wilderness growth absorbing air-borne carbon in biomass can drawdown such accumulation. Urgent renewable energy reliance is vital in time to avoid imminent tipping points and the worsening " <i>climate emergency</i> ".
Ozone layer depletion	Stratospheric ozone loss weakens the planet's solar shield so more shorter wavelength ultraviolet (UVB) light reaching earth damages plants and increases malignant melanoma and skin cancer in humans and animals. Chlorofluorocarbons, hydrochlorofluorocarbons (HCFC), chlorobromomethane, hydrobromofluorocarbons, carbon tetrachloride, methyl chloroform, methyl bromide and halon gas cause ozone layer loss. To repair the " ozone hole " reliance on ozone-safe refrigerants, aerosols and solvents is essential to avoid further its depletion and enable accumulation of naturally-formed ozone.
Acidification	Acidification reduces soil and waterway pH, impedes nitrogen fixation vital for plant growth and inhibits natural decomposition. It increases rates and incidence of fish kills, forest loss and deterioration of buildings and materials. Chief synthetic causes of " <i>acid rain</i> " are emissions of sulphur and nitrogen oxides, hydrochloric and hydrofluoric acids and ammonia from burning fossil fuels polluting precipitation of rain and snow world-wide.
Eutrophication of terrestrial, freshwater and marine life	Eutrophication from excessively high macronutrient levels added to natural waters promotes excessive plant growth that severely reduces oxygen, water and habitat security for aquatic and terrestrial organisms across related ecosystems. Chief synthetic cause of " <i>algal blooms</i> " is nitrogen (N, NOx, NH ₄) and phosphorus (P, PO ₄ ³⁻) in rain run-off over-fertilised land catchments.
Photochemical ozone creation	Tropospheric photochemical ozone, called " <i>summer smog</i> " near ground level, is created from natural and synthetic compounds in UV sunlight. Low concentration smog damages vegetation and crops. High concentration smog is hazardous to human health. Chief synthetic causes are nitrogen oxides, carbon monoxide and volatile organic compounds (VOC) pollutants. Avoiding reliance on dirtiest coal fuel and volatile chemicals has reduced smog incidence in many areas globally.
Depletion of minerals, metals & water	Abiotic depletion of finite mineral resources increases time, effort and money required to obtain more resources to the point of extinction of naturally viable reserves. This can limit access to available, valuable and scarce elements vital for human-life. The youth movement " <i>extinction rebellion</i> " calls on adults to secure climate, reserves and biodiversity for current and future generations.
Depletion of fossil fuel reserves	Abiotic depletion of resources by consuming finite oil, natural gas, coal and yellowcake fossil fuel reserves leaves current and future generations suffering limited available, accessible, plentiful, essential valuable as well as scarce raw material, medicinal, chemical, feedstock and fuel stock. Approaching " <i>peak oil</i> " acknowledged fossil fuel reserves are finite and the need for decision-makers to act to avoid market instability, insecurity and or oil and gas wars.



Glossary of Terms, Methods and Units

Acronyms, methods and units of impact	potentials pl	us inventory inputs and outputs, are d	efined below
Impact Potentials	Acronym	Description of Methods	Units
Climate Change fossil	GWP ff	GWP fossil fuels [7]	kg CO _{2eq}
Climate Change biogenic	GWP bio	GWP biogenic [7]	kg CO _{2eq}
Climate Change land use	GWP luluc	GWP land use & change [7]	kg CO _{2eq}
Climate Change total	GWP t	Global Warming Potential [7]	kg CO _{2eq}
Stratospheric Ozone Depletion	ODP	Stratospheric Ozone Loss [8]	kg CFC _{11eq}
Photochemical Ozone Creation	POCP	Summer Smog [9]	kg NMOC _{eq}
Acidification Potential	AP	Accumulated Exceedance [10]	mol H⁺ _{eq}
Eutrophication Freshwater	EP fresh	Excess nutrients freshwater [11]	kg P _{eq}
Eutrophication Marine	EP marine	Excess marine nutrients [11]	kg N _{eq}
Eutrophication Terrestrial	EP land	Excess Terrestrial nutrients [11]	mol N _{eq}
Mineral & Metal Depletion	ADP min	Abiotic Depletion minerals [12]	kg Sb _{eq}
Fossil Fuel Depletion	ADP ff	Abiotic Depletion fossil fuel [13]	MJ ncv
Water Depletion	WDP	Water Deprivation Scarcity [14, 15]	m^3 WDP eq
Fresh Water Net	FW	Lake, river, well & town water	m ³
Secondary Material	SM	Post-consumer recycled (PCR)	kg
Secondary Renewable Fuel	RSF	PCR biomass burnt	MJ ncv
Primary Energy Renewable Material	PERM	Biomass retained material	MJ _{ncv}
Primary Energy Renewable Not Feedstock	PERE	biomass fuels burnt	MJ ncv
Primary Energy Renewable Total	PERT	Biomass burnt + retained	MJ ncv
Secondary Non-renewable Fuel	NRSF	PCR fossil-fuels burnt	MJ _{ncv}
Primary Energy Non-renewable Material	PENRM	Fossil feedstock retained	MJ ncv
Primary Energy Non-renewable Not Feedstock	PENRE	fossil-fuel used or burnt	MJ nov
Primary Energy Non-renewable Total	PENRT	Fossil feedstock & fuel use	MJ _{ncv}
Hazardous Waste Disposed	HWD	Reprocessed to contain risks	kg
Non-hazardous Waste Disposed	NHWD	Municipal landfill facility waste	kg
Radioactive Waste Disposed	RWD	Mostly ex nuclear power stations	kg
Components For Reuse	CRU	Product scrap for reuse as is	kg
Material For Recycling	MFR	Factory scrap to remanufacture	kg
Material For Energy Recovery	MER	Factory scrap use as fuel	kg
Exported Energy Electrical	EEE	Uncommon for building products	MJ ncv
Exported Energy Thermal	EET	Uncommon for building products	MJ _{ncv}



Product Information

This section provides data required to calculate assessment results factoring different mass and periods.

Brand Name & Code	Euroscreen® Transparent
Range Names	Transparent blind fabric
Factory warranty	7 years internal use only
Manufacturer, address and site representation	Textile cutting and dispatch: Verotex AG, Germany 95236 Stammbach. Dyeing: Textilveredlung Drechsel GmbH Lohmuehle 1 Germany95100 Selb. Fabric: SR Webatex GmbH Tunnelstr. 6 Germany-95448 Bayreuth.
Application	Window Coverings
Function in Building	Glare and light control designed for interior dry areas of all buildings
Lifetime [5,6]	20 years Reference Service Life (RSL) [ISO 15686]
Declared unit	1 kg = 285 grams/m ² 0.46mm thick, 3000mm wide declared product
Functional unit	20 years use of a kilogram of Euroscreen™ Transparent blind fabric.

Product Components

This section summarises factory components, functions, source nation and % mass share. In product content listed below the % mass has a $\pm 5\%$ range and a confidence interval that is 90% certain to contain true population means at any time. Listing such 90 $\pm 5\%$ certainty considers normal resource acquisition, supply chain, sedimentation, seasonal, manufacturing and product colour variation over this EPD's 5-year validity period. This also allows for intellectual property protection whilst ensuring fullest possible transparency.

Function	Component	Source	Amount
Fabric	Polyester	Germany	>88 <91
White pigment	Titanium Dioxide	Europe	>3.5 <4.0
Vehicle	Melamine copolymer	Europe	>3.0 <3.2
Colours & black	Organic pigment	Germany	>1.3 <1.4
Plasticiser	Dioctyl phthalate	Germany	>1.1 <1.3
Solubiliser	C9 & C10 fatty acids saturated	Global	>1.1 <1.3
Antioxidant &	Dimethylheptan3yl phenol	Europe	>1.1 <1.3
Fire retarder	Nonyl Phenyl Phosphite	Europe	>0.3 <0.4
Biocide	Nano Silver	Global	>0.1<0.2
Packing			
Forms & packing	Cardboard and paper	Germany	>20 <28
Caps & wrapping	Polyethylene	Germany	>0.5 <0.7
Pallets	Wood	Germany	>0.5 <0.6
Strapping	Polypropylene	Germany	>0.2 <0.4

Product Functional & Technical Performance Information

This section provides manufacturer specifications and additional information

Specifications	https://www.vertilux.com.au/blind_fabrics/eurovision-transparent/
Practices Reference	http://www.vertilux.com.au/materials/blind-fabrics
Installation Procedure	http://www.blindsinstallationguide.com.au
Practicality	A transparent fabric designed to reduce heat, light glare and harmful UV rays. It helps maintain indoor comfort, energy efficiency and clear views.
Fire Classification	AWTA AS1530.2 1993, AWTA AS1530.3 1993, AWTA AS3837 1998, German Standard DIN 4102 – B1 and French Standard: M1
Emissions	Volatile Organic Compound (VOC) ASTM D5116 and 100% Trevira CS Free of PVC, Formaldehyde and Halogen
Durability	Oeko-Tex Certified DIN EN ISO 105 B2: 6 - 7 Excellent Lightfastness 5+



Scenarios for Modules

This section defines modelling stages scenarios A4 to D3 beyond actual operations in module A1 to A3.

A4 Transport to Site	Type specified	Amount	Type specified	Amount
Intercity road trucking	2t to 5t vans	220 km	85% Capacity	Full back load
Long distance road trucking	25t semi-trailer	600 km	85% Capacity	Full back load
Continental freight rail	Diesel train	600 km	85% Capacity	Full back load
Global container shipping	Factory to CBD	1,200km	85% Capacity	Full back load
Volume capacity (<1 to ≥1)	Utilisation factor	1	Uncompressed	Un-nested
A5 Installation				
Utilities used	Grid Power	0.0042MJ	Town water	Nil
Emissions	VOCs indoors	Nil		
Waste on site	Scrap Trim	5%	Scrap Fate	Landfill
Emissions	From landfill	All known		
Collection	Council site bins	0.05 kg	Landfill route	50km no return
All packaging	As declared	kg	Energy recovery	nil
Pack waste collection	Council site bins	0.0004kg	Landfill route	50km no return
Pack scrap recycled	Council site bins	0.003kg	To Recycler	50km no return

Modules B1 Use of building fabric, B4 Replacement, B5 Refurbishment, B6 Operating Energy and B7 Operating Water each have zero flows. Scenarios for Building B2 and B3 are listed below.

2 Maintenance	Type specified	Amount	Type specified	Amount
Maker's specified process	URL declared	Specified	Clean cycle	Annual
Vacuum cleaning energy	Annually	0.007MJpa	Power mix	National grid
B3 Repair	Damaged	5%	Maker's process	As per website
New Product	As manufactured	5%	Freight to site	5% A5
Scrap	Fate landfill	0.025kg	Recyling	0.025kg
Energy input & source	No excess	Nil	Packaging	5% A5

Module C3 Waste Treatment has zero flows. End of Life scenarios C1, C2 and C4 are listed below.

C1 Demolition	Type specified	Amount	Type specified	Amount
Operation	remove damaged	5%	Collection	Separate
Collection process	In site waste	5%	Separate to reuse	0
C2 Transport	25t truck road	50km	85% capacity	No back load
C4 Disposal	Product specific	0.025kg	Collect separately	0.025kg
Typical Scenario	Damaged to landfill	2.5%	All emissions	mass share
Recovery system	Recycling	2.5% kg	Not for energy	0.0 kg

Scenarios for modules D1Reuse, D2 Recovery and D3 Recycling are listed below.

D Beyond System Boundary						
D1 Reuse	Type specified	Amount	Type specified	Amount		
Typical performance	Fit for purpose	95%	Reuse in place	0.95kg		
D2 Recovery	Surface Vacuum	95%	Clean in place	0.95kg		
D3 Recycle	Take back	2.5%	Clean fibre	0.025kg		

.



Module A1 to A5 Results

Table 1 shows results from A1 Resources, A2 Transport, A3 Manufacture, A4 Transport to A5 Construction.

Table 1 A1-3 to A5 Impact & Inventory Results/Functional Unit					
Result	A1-3	A4	A5		
Climate Change biogenic	-1.3	0	-6.2E-02		
Climate Change Iuluc	2.3E-04	2.8E-09	1.1E-05		
Climate Change fossil	22	0.17	1.05		
Climate Change total	20	0.17	0.99		
Stratospheric Ozone Depletion	9.5E-07	2.9E-13	4.6E-08		
Photochemical Ozone Creation	0.14	9.3E-04	7.0E-03		
Acidification Potential	7.8E-02	9.0E-05	3.8E-03		
Eutrophication Freshwater	6.4E-06	2.1E-09	3.1E-07		
Eutrophication Marine	2.0E-02	1.7E-05	9.8E-04		
Eutrophication Terrestrial	4.8E-02	5.5E-05	2.3E-03		
Fossil Depletion	19	2.0E-01	0.93		
Mineral and Metal Depletion	1.5E-02	1.1E-05	7.3E-04		
Water Scarcity Depletion	2.1	1.6E-05	10.0E-02		
Net Fresh Water Use	13	1.0E-04	0.62		
Secondary Material	6.2	4.7E-06	0.29		
Secondary Renewable Fuel	3.2	0	0.16		
Primary Renewable Material	0.01	3.7E-03	0.45		
Primary Energy Renewable Not Feedstock	19	5.1E-04	1.1		
Primary Energy Renewable Total	19	4.2E-03	1.5		
Secondary Non-renewable Fuel	1.5	1.1E-03	0.07		
Primary Energy Non-renewable Material	83	0.97	4.1		
Primary Non-renewable Energy Not Feedstock	219	1.6	11		
Primary Energy Non-renewable Total	302	2.6	15		
Hazardous Waste Disposed	1.6E-02	3.3E-04	8.0E-04		
Non-hazardous Waste Disposed	6.2	2.9E-03	0.32		
Radioactive Waste Disposed	1.8E-14	1.7E-31	8.3E-16		
Components For Reuse	0	1.8E-300	5.9E-302		
Material For Recycling	0.40	1.0E-05	6.0E-02		
Material For Energy Recovery	2.2E-03	3.4E-07	1.0E-04		
Exported Energy Electrical	0	0	0		
Exported Energy Thermal	0	0	0		



Module B1 to B7 Results

Table 2 shows results for building operations from B1 Use, B2 Maintain, B3 Repair, B4 Replace, B5 Refurbish, B6 Energy Use to B7 Water Use

Table 2 B1 to B7 Impact & Inventory Results/Functional Unit

Table 2 B1 to B7 Impact & Inventory Results/Functional Unit							
Result	B1	B2	B 3	B4	B5	B6	B7
Climate Change biogenic	0	-2.6E-04	-6.2E-02	0	0	0	0
Climate Change luluc	0	4.1E-07	1.1E-05	0	0	0	0
Climate Change fossil	0	0.05	1.05	0	0	0	0
Climate Change total	0	4.5E-02	9.9E-01	0	0	0	0
Stratospheric Ozone Depletion	0	2.1E-15	4.6E-08	0	0	0	0
Photochemical Ozone Creation	0	2.4E-04	7.0E-03	0	0	0	0
Acidification Potential	0	1.1E-04	3.8E-03	0	0	0	0
Eutrophication Freshwater	0	1.3E-11	3.1E-07	0	0	0	0
Eutrophication Marine	0	2.0E-05	9.8E-04	0	0	0	0
Eutrophication Terrestrial	0	1.5E-04	2.3E-03	0	0	0	0
Fossil Depletion	0	2.8E-02	9.3E-01	0	0	0	0
Mineral and Metal Depletion	0	2.2E-10	7.3E-04	0	0	0	0
Water Scarcity Depletion	0	2.8E-06	1.0E-01	0	0	0	0
Net Fresh Water Use	0	4.1E-07	1.1E-05	0	0	0	0
Secondary Material	0	-2.60E-04	-6.18E-02	0	0	0	0
Secondary Renewable Fuel	0	1.2E-03	0.16	0	0	0	0
Primary Renewable Material	0	5.2E-08	0	0	0	0	0
Primary Energy Renewable Not Feedstock	0	2.7E-02	0.92	0	0	0	0
Primary Energy Renewable Total	0	2.7E-02	0.92	0	0	0	0
Secondary Non-renewable Fuel	0	1.6E-08	0.07	0	0	0	0
Primary Energy Non-renewable Material	0	8.4E-03	4.1	0	0	0	0
Primary Non-renewable Energy Not Feedstock	0	0.50	11	0	0	0	0
Primary Energy Non-renewable Total	0	0.51	15	0	0	0	0
Hazardous Waste Disposed	0	8.0E-04	8.0E-04	0	0	0	0
Non-hazardous Waste Disposed	0	0.32	0.32	0	0	0	0
Radioactive Waste Disposed	0	8.3E-16	8.3E-16	0	0	0	0
Components For Reuse	0	5.9E-302	5.9E-302	0	0	0	0
Material For Recycling	0	6.0E-02	6.0E-02	0	0	0	0
Material For Energy Recovery	0	1.0E-04	1.0E-04	0	0	0	0
Exported Energy Electrical	0	0	0	0	0	0	0
Exported Energy Thermal	0	0	0	0	0	0	0

VertiluxTR04EuroscreenTransparentEPD15804+A22019C2F@Evah16Dec2022.docx



Module C1 to C4 Results

Table 3 shows End-of-Life results for C1 Demolish, C2 Transport, C3 Process waste and C4 Disposal.

Table 3 C1 to C4 Impact & Inventory Results/Functional Unit					
Result	C1	C2	C3	C4	
Climate Change biogenic	-1.1E-04	0	0	0	
Climate Change Iuluc	1.7E-07	1.4E-09	0	1.7E-10	
Climate Change fossil	1.9E-02	6.1E-03	0	6.1E-03	
Climate Change total	1.9E-02	6.1E-03	0	6.1E-03	
Stratospheric Ozone Depletion	9.0E-16	1.1E-13	0	8.8E-14	
Photochemical Ozone Creation	1.0E-04	6.0E-05	0	1.4E-04	
Acidification Potential	4.6E-05	5.1E-06	0	1.8E-05	
Eutrophication Freshwater	5.7E-12	3.1E-10	0	2.6E-10	
Eutrophication Marine	8.5E-06	9.5E-07	0	3.3E-06	
Eutrophication Terrestrial	6.2E-05	3.4E-06	0	6.4E-06	
Fossil Depletion	1.2E-02	7.5E-03	0	7.2E-03	
Mineral and Metal Depletion	9.5E-11	4.0E-06	0	4.0E-06	
Water Scarcity Depletion	1.2E-06	1.4E-06	0	1.2E-06	
Net Fresh Water Use	7.4E-03	8.7E-03	0	7.6E-03	
Secondary Material	2.2E-04	2.2E-06	0	1.5E-06	
Secondary Renewable Fuel	2.2E-08	0	0	1.3E-03	
Primary Renewable Material	1.1E-02	0	0	9.6E-05	
Primary Energy Renewable Not Feedstock	1.1E-02	1.6E-03	0	1.4E-03	
Primary Energy Renewable Total	6.7E-09	2.1E-04	0	3.9E-04	
Secondary Non-renewable Fuel	3.6E-03	1.8E-03	0	3.6E-02	
Primary Energy Non-renewable Material	0.21	4.8E-04	0	6.1E-02	
Primary Non-renewable Energy Not Feedstock	0.22	3.7E-02	0	9.6E-02	
Primary Energy Non-renewable Total	1.0E-06	1.2E-05	0	1.2E-05	
Hazardous Waste Disposed	1.0E-06	1.2E-05	0	1.2E-05	
Non-hazardous Waste Disposed	5.4E-05	9.7E-05	0	0.25	
Radioactive Waste Disposed	9.2E-37	8.5E-32	0	5.4E-32	
Components For Reuse	0	0	0	0	
Material For Recycling	2.9E-04	4.6E-06	0	0.75	
Material For Energy Recovery	2.1E-12	1.5E-07	0	1.2E-07	
Exported Energy Electrical	0	0	0	0	
Exported Energy Thermal	0	0	0	0	



Module D1 to D4 Results Beyond System Boundaries

Table 4 shows results for Beyond System Boundaries in phases D1 Reuse, D2 Recovery to D3 Recycle.

Table 4 D1 to D4 Impact & Inventory Results/Functional Unit					
Result	D1	D2	D3		
Climate Change biogenic	-0.17	-1.9E-05	-4.3E-07		
Climate Change Iuluc	0.20	2.4E-09	0		
Climate Change fossil	0.96	2.8E-04	0.1		
Climate Change total	0.94	2.6E-04	0.1		
Stratospheric Ozone Depletion	1.3E-08	5.9E-13	1.8E-09		
Photochemical Ozone Creation	3.8E-03	1.2E-06	5.0E-04		
Acidification Potential	1.7E-03	5.2E-07	2.8E-04		
Eutrophication Freshwater	1.3E-07	1.2E-10	5.0E-09		
Eutrophication Marine	3.8E-04	9.4E-08	6.0E-05		
Eutrophication Terrestrial	9.2E-04	6.9E-07	1.7E-04		
Fossil Depletion	2.0E-04	1.7E-04	0.09		
Mineral and Metal Depletion	0.80	5.8E-08	3.3E-05		
Water Scarcity Depletion	4.6E-02	1.8E-05	1.3E-03		
Net Fresh Water Use	0.28	1.1E-01	7.7		
Secondary Material	0.36	1.7E-04	0.03		
Secondary Renewable Fuel	0.5	4.3E-05	1.3E-03		
Primary Renewable Material	0.01	3.0E-05	3.3E-03		
Primary Energy Renewable Not Feedstock	3.0	1.4E-04	0.14		
Primary Energy Renewable Total	3.0	1.7E-04	0.14		
Secondary Non-renewable Fuel	0.22	7.7E-06	1.3E-03		
Primary Energy Non-renewable Material	13	0	0.11		
Primary Non-renewable Energy Not Feedstock	35	0	1.43		
Primary Energy Non-renewable Total	48	3.1E-03	1.53		
Hazardous Waste Disposed	7.2E-04	1.9E-07	1.1E-04		
Non-hazardous Waste Disposed	0.098	2.0E-05	0.01		
Radioactive Waste Disposed	2.2E-16	5.0E-21	3.3E-17		
Components For Reuse	0	0	0		
Material For Recycling	3.6E-03	1.6E-05	5.0E-04		
Material For Energy Recovery	6.4E-05	6.5E-09	2.5E-06		
Exported Energy Electrical	0	0	0		
Exported Energy Thermal	0	0	0		



Interpretation

This interpretation discusses product results cradle to grave.

Table 5 lists A1 to A3 Polyester fabric and acrylic block-out component mass /kg **product.**

Figure 3 shows A1 to A3 GWP results most sensitive to Polyester fabric and least to acrylic block-out content.

Figure 4 shows A1 to A3 Acidification (AP), Marine Eutrophication (EP $_{Mar}$) and Terrestrial (EP $_{Terra}$) results /kg product most sensitive to Polyester content.




Figure 3 A1-A3 Component & EE% share//kg

Table 5 Component A1-A3/kg

	Fabric	Block
Eurobloc NFR1	47.3	56.2
Metallo Metallised	47.3	5.0
Euroscreen Metal	100.7	5.0
Eurovision Metal	103.9	2.2
Euroview	106.5	0
Channel	106.5	0
Eurovision	106.7	0
Euroscreen	106.8	0







Figure 5 shows GWP, Abiotic Depletion of Fossil Fuel (ADP FF) /kg product and Figure 6 shows Photochemical Smog (POCP), AP, EP_{Mar} and GWP/kg.

Both show most damage from A1-A3 and other phases are insignificant, until D3 and D1 beyond the system boundary.

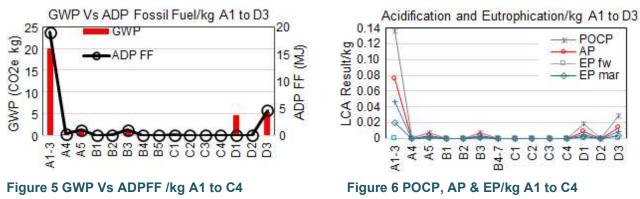

Module D Beyond System Boundary results show typical D1 Reuse of 95% of intact product for 40 more years reduces all impacts >95%/kg for a 60-year building life with the 5% of the same new product.

Subsequently as most remain unchanged over built life no significant damages arise for phases A4 to C4.



References

- [1] EN 15804:2012+A2:2019 Sustainability of construction works Environmental product declarations -Core rules for the product category of construction products.
- [2] GreenTag[™] 2021 EPD Program, Product Category Rules <u>https://www.globalgreentag.com/EPD</u>.
- [3] ISO 14025:2010 Environmental labels and declarations Type III environmental declarations -Principles and procedures.
- [4] ISO14044:2006 Environmental management Life cycle assessment Requirements and guidelines.
- [5] ISO 15686-2:2012 Buildings and constructed assets Service life planning Part 2: Service life prediction procedures.
- [6] ISO 15686-8:2008 Buildings and constructed assets Service-life planning Part 8: Reference service life and service-life estimation.
- [7] IPCC 2013, Global Warming Potential 100-year, IPCC Fifth Assessment Report Climate Change.
- [8] WMO 2014, Ozone Depletion Potentials for Steady-state, Scientific Assessment of Ozone Depletion: 2014, Global Ozone Research and Monitoring Project Report No. 55, 2014.
- [9] Van Zelm, R., Huijbregts, M., Hollander, H., Jaarsveld, H., Sauter, F., Struijs, J., Wijnen, H., Van de meent, D. 2008, European characterization factors for human health damage of PM10 and ozone in life cycle impact assessment, J O Atmospheric Environment 42(3):441-453, as applied in ReCiPe LOTOS-EUROS. DOI: 10.1016/j.atmosenv.2007.09.072
- [10] Seppälä, J., Posch, M., Johansson, M. and Hettelingh, J-P. 2006 Country-dependent Characterisation Factors for Acidification and Terrestrial Eutrophication Based on Accumulated Exceedance as an Impact Category Indicator, T Int J O LCA 11(6):403-416 Nov 2006 DOI:10.1065/lca2005.06.215
- [11] Posch, M., Seppälä, J., Hettelingh, J-P., and Johansson, M., (2008) The role of atmospheric dispersion models and ecosystem sensitivity in the determination of characterisation factors for acidifying and eutrophying emissions in LCIA, Sept 2008, I J of Life Cycle Assessment 13(6):477-486., DOI:10.1007/s11367-008-0025-9
- [12] Struijs, J., Beusen, A., van Jaarsveld, H. & Huijbregts, M.A.J. (2009b). Aquatic Eutrophication. Ch 6 in: Goedkoop, M., Heijungs, R., Huijbregts, M.A.J., De Schryver, A., Struijs, J., Van Zelm, R. (2009). ReCiPe 2008 A life cycle impact assessment method which comprises harmonised category indicators at the midpoint and the endpoint level. Report I: Characterisation factors, 1st Ed.
- [13] CML–IA V4.1 LCA methodology, 2002, October 2012, CML University of Leiden, Netherlands.
- [14] Guinée et al., 2002, and van Oers et al., 2002 CML LCA methodology 2002a, Institute of Environmental Sciences (CML), Faculty of Science, University of Leiden, Netherlands.
- [15] Boulay, A-M., Bare, J., Benini, L., Berger, M., Lathuilliere, M., Manzardo, A., Margni, M., Motoshita, M., Núñez, M., Pastor, A., Ridoutt, B., Oki, T., Worbe, S., Pfister, S. (2018). The WULCA consensus characterization model for water scarcity footprints: assessing impacts of water consumption based on available water remaining (AWARE). I J of LCA. 23. 1-11. 10.1007/s11367-017-1333-8.

Bibliography

Ciroth A., Hildenbrand J., Zamagni A. & Foster C., 2015, Data Review Criteria. Annex A: LCI Dataset Review Criteria, 10.13140/RG.2.1.2383.4485 UN EP Life Cycle Initiative

EN ISO 14024:2000, Environmental labels and declarations - Type I environmental labelling -Principles and procedures (ISO 14024:1999).

EN ISO 14040:2006, Environmental management - Life cycle assessment - Principles and framework (ISO14040:2006).

EN 15643-1:2010, Sustainability of construction works - Sustainability assessment of buildings - Part 1: General framework.

EN 15643-2, Sustainability of construction works - Assessment of buildings - Part 2: Framework for the assessment of environmental performance.

EN 16449, Wood and wood-based products - Calculation of the biogenic carbon content of wood and conversion to carbon dioxide.

ISO 21930:2007 Sustainability in building construction - Environmental declaration of building products.

ISO 21931-1:2010, Sustainability in building construction - Framework for methods of assessment of the environmental performance of construction works - Part 1: Buildings.